



CUSTOM 1PH from 300A to 800A




GENERAL DESCRIPTION

- Revo S has been specifically designed for OEM. This product can be customized
- These simple units can be connected with REVO PC to manage multizone system this minimize your energy cost by controlling synchronization and power limit on each zone
- All circuit board, fuses and Thyristor can be inspected just opening front door
- Input signal: SSR, Analog as an option
- Zero Crossing, Burst Firing available at 4, 8 or 16 Cycles at 50% Power demand
- Electronic circuit fully isolated from power with constant current drain on input.
- Heater Break alarm option to diagnose partial or total load failure and Thyristor Short circuit
- Internal fixed fuses are standard
- Current transformer integrated
- Special design for Heat sink with very high dissipation value
- Comply with EMC
- Panel Mounting
- IP20 Protection available as option

TECHNICAL SPECIFICATION

Voltage power supply	24V minimum to 480V, 600V and 690V On request		
Voltage Frequency	50 or 60 Hz no setting needed from 47 to 70 Hz		
Nominal Current	300A, 550A, 800A		
Input Signal	SSR	4:30Vdc	5mA Max (On ≥ 4Vdc Off ≤ 1Vdc);
	Voltage input	0:10Vdc	impedance 15 K ohm;
	Current input	0:20/4:20mA	impedance 100 Ohm;
Firing	Zero Crossing, Burst Firing with analog input signal only		
Auxiliary Voltage Supply	90:130Vac	8VA Max	
	170:265Vac	8VA Max	(Standard)
	230:345Vac	8VA Max	
	300:530Vac	8VA Max	(Standard)
	510:690Vac	8VA Max	
Heather Break Alarm	Microprocessor based with automatic setting Digital Input, Relay Output 0,5A at 110V (option)		
Mounting	Panel Mounting		
Operating Temperature	40 °C without derating. Over this temperature see below derating curve		
Storage temperature	-25 °C to 70 °C Max		
Altitude	Over 1000 m of altitude reduce the nominal current of 2% for each 100m		
Humidity	From 5 to 95% without condense and ice		

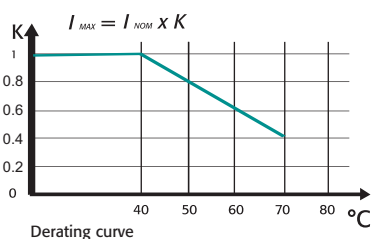

OPTION'S FEATURES AND SPECIAL DETAILS

HEATER BREAK ALARM HB


ON FRONT CABINET



FEW SECOND TO SET AND CALIBRATE ALL THE UNITS

- Microprocessor based circuit
- Capacity to diagnose the failure of one Resistance over five in parallel
- Load failure alarm with LED indication on front unit
- Thyristor short circuit alarm with LED indication on front unit
- Alarm output with free voltage relay contact
- Alarm reset function and possibility to auto reset if the alarm disappear
- Built in Current transformer when heather Break option has been selected
- Self Setting via external command or push button on front unit
- Common setting command can be given to many units and in a matter of second, the tuning is done, also by a non expert operator


HOW TO ADD POWER LOAD MANAGMENT AND FEATURES TO YOUR SIMPLE UNITS



APPLICATION WITH 8, 16 OR 24 THREE-PHASE LOADS

Use REVO-PC and you can add these Features

- Communication with different field bus
- Reading of current Voltage and Power
- Instantaneous power very close to average value, no pick power
- Power factor close to one no harmonics
- Prevents increase in energy supply tariffs imposed by your electricity supplier

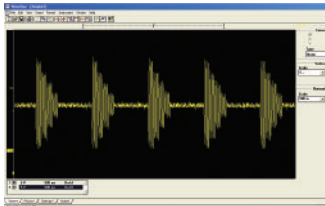


WITHOUT POWER CONTROL OPTIMISATION

Synchronization

On all controlled zones, REVO-PC Synchronization is automatic resulting in superior performance:

- Total current is equal to a sinusoidal wave form.
- Power factor > 0,9.
- Instantaneous current close to average value.
- Cancellation of harmonics.
- Flickering effect removed.

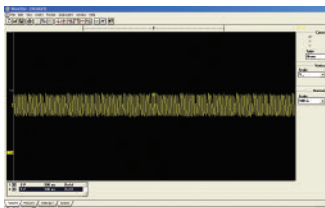

WITH POWER CONTROL OPTIMISATION

Smart power limitation


- Smart power limitation works together with synchronization. If this function is enabled, REVO-PC makes a live calculation of power at each period and generates the output values for the next period. If the calculated power is below the power limit value, the previous values remain with each channel using full power.
- If the power is above the power limit value, the setpoint of each channel is reduced proportionally to restrict power overshoot. This function significantly reduces disturbances on the main network compared to a full power system, preventing any increase in energy tariffs imposed by the electricity supplier.
- This function can be activated/deactivated and the limit value changed at any time.

APPLICATIONS AND FOCUS ON:

- Autoclaves.
- Fournaces.
- Dryers
- Chemical

WIRING CONNECTION CUSTOM 1PH from 300 to 800A


CUSTOM 1PH from 300 to 800A

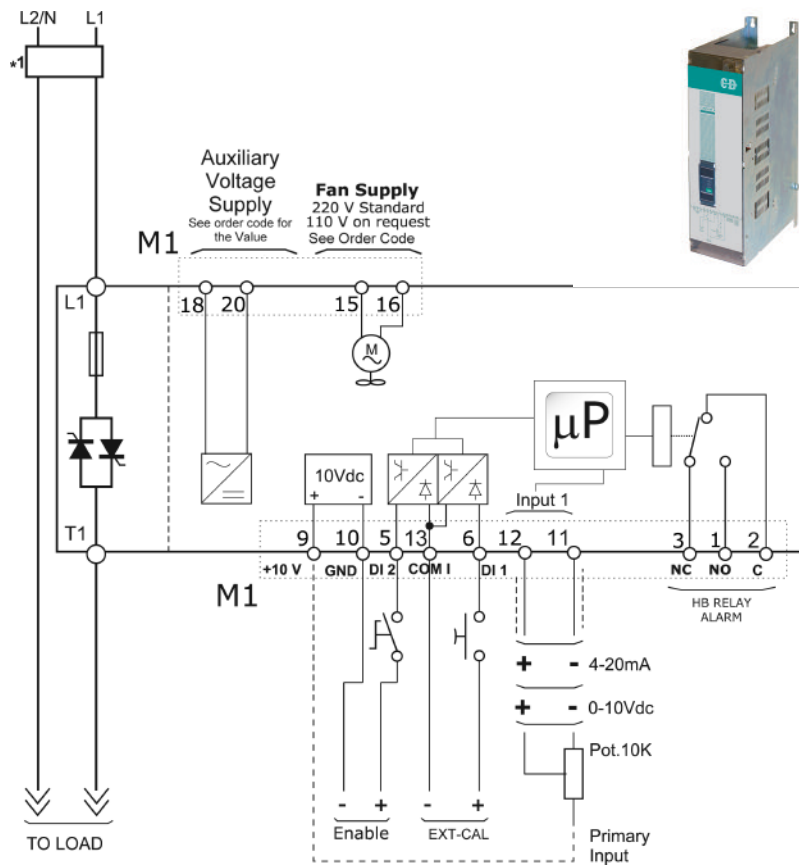

NOTE


- (1) • A suitable device must ensure that the unit can be electrically isolated from the supply, this allows the qualified people to work in safety.
- (2) • The heat-sink must be connected to the earth.
- The user installation must be protecting by electromagnetic circuit breaker or by fuse isolator. The semiconductor fuses are classified for UL as supplementer protection for semiconductor.
- (3) • Only for the HB option

DIMENSION AND FIXING HOLES

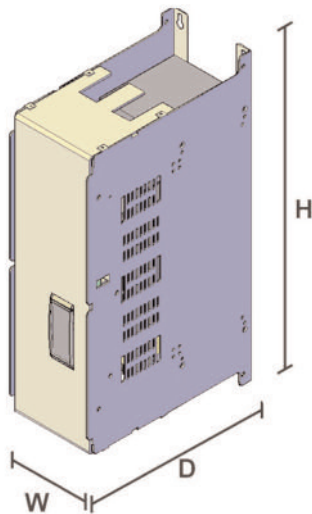

S9H W 130 mm. - H 478 mm. - D 274 mm. - kg. 14

300A to 800A

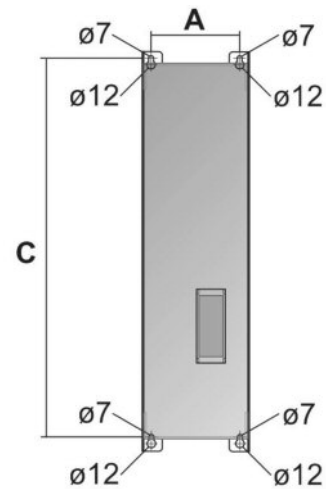

A 106 mm. - **B** 24 mm. - **C** 448 mm.

300A to 800A

OUTPUT FEATURES (POWER DEVICE)

Current A	Voltage range (V)	Ripetitive peak reverse voltage (480V) (600V)		Latching current (eff)	Max peak one cycle (10msec.)	Leakage current (mAeff)	I ² T value for fusing tp=10msec.	Frequency range (Hz)	Power loss I=I _{nom} (W)	Isolation Voltage Vac
300A	24+600V	1200	1600	200	7800	15	300000	47+70	397	2500
550A	24+600V	1200	1600	200	8000	15	306000	47+70	530	2500
800A	24+600V	1200	1600	1000	17800	15	1027000	47+70	589	2500

Fan Specification

Supply: 230V Standard	Input Power 17W
Supply: 115V Option	Input Power 14W

ORDERING CODE CUSTOM 1PH from 300 to 800A

		1	2	3	4	5	6	-	7	8	9	10	11	12	13	14	15	16			
CUSTOM 1PH		C	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-			
4, 5, 6 Current		9 Input		11 Control Mode		14 Approvals		12 Fuse & Option		15 Manual		13 Fan Voltage		16 Version							
Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code					
Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code					
300A		SSR		Open Loop		CE EMC		Fix Fuses Standard		None		Fan 110V		Std with Fuse							
0 3 0 0		S		0		0		F		0		1		1							
550A		0:10V dc		Fix Fuses + CT		Italian Manual		Fix Fuses + CT + HB		Italian Manual		Fan 220V Standard		2							
0 5 5 0		V		Y		1		H		2		2		1							
800A		4:20mA		A		English Manual				3				2							
0 8 0 0		A				German Manual				4				3							
						French Manual				4				4							
7 Max Voltage		10 Firing																			
Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code	
Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code	
480V		Zero Crossing ZC		Burst Firing		Burst Firing		Fan 110V		Fan 220V Standard		Fan 110V		Std with Fuse							
4		Z		4 Cycles On at 50% Power Demand		8 Cycles On at 50% Power Demand		1		2		1		1							
600V		Burst Firing		4 (2)		8 (2)		2				2		1							
6		16 Cycles On at 50% Power Demand		6 (2)																	
690V		Burst Firing																			
7		16 Cycles On at 50% Power Demand		6 (2)																	
8 Aux. Voltage supply																					
Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code		Description code	
Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code		Numeric code	
90:130V (1)																					
1																					
170:265V (1)																					
2																					
300:530V (1)																					
5																					
510:690V (1)																					
6																					
600:760V (1)																					
7																					

LEGEND

IF = Internal Fixed Fuse
 CT = Current Transformer
 HB = Heater Break Alarm

Note (1): Load voltage must be included in Selected Auxiliary Voltage Range for units >210A

Note (2): Available only with Analog input

