


CD RS RS232 - RS485 CONVERTER



General Description


- Configurable communication RS485 or 232
- RS232 frontal connector
- 2500V insulation between input/output
- Smart and compact converter
- DIN Rail mounting
- Side by side packaging
- Competitive price
- EMC conformity and  mark

Technical specification


Power Supply	120-240Vac \pm 10%
Voltage Power/Frequency	50/60 Hz
Input / Output	standard RS232 / RS485 RS422
Consumption	5VA
Panel Assembling	DIN Rail mounting or bulk Head with fixing holes
LED	Input and output data transfer indication
RS232 Connection	Front unit connector
RS485/422 Connection	Screw terminals
Power Supply Connection	Screw terminals
Operating Temperature	0÷50 °C
Storage Temperature	-20÷70°C




Connections

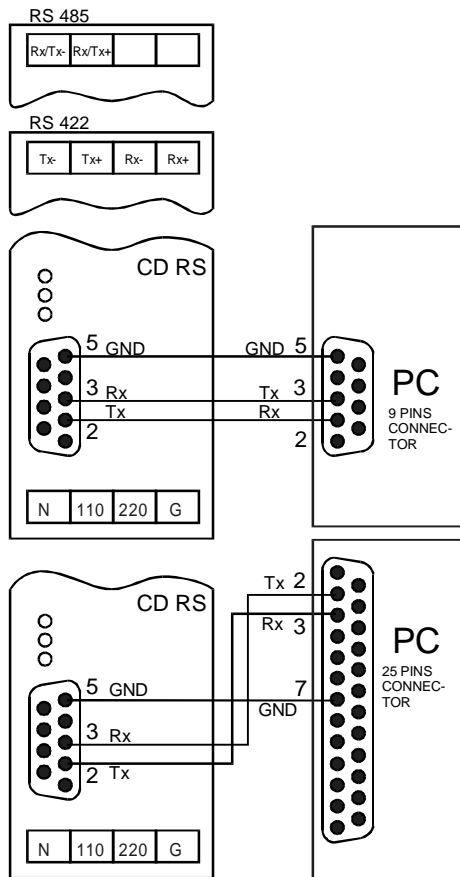

Dimensions

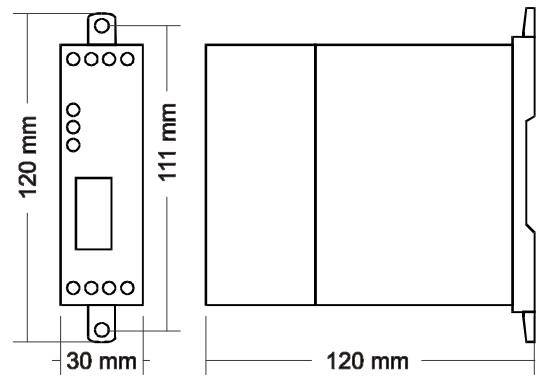


Selectable Comm. Type



Ordering Code

Order Code CD RS / - - - / - - - / M-

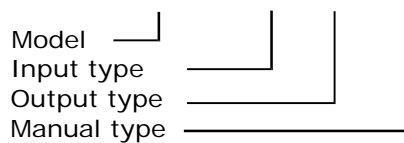

MODEL

RS Converter

INPUT

Code	Description
232	RS232

OUTPUT

Code	Description
485	RS485
422	RS422

MANUAL TYPE

Code	Description
1	Italian Manual
2	English Manual



CD Automation Srl

Via F.lli Cervi, 42/44
20020 Cantalupo di Cerro Maggiore (MI)
ITALY

tel: +39 0331 533512

fax: +39 0331 533516

www.cdautomation.com

info@cdautomation.com

