

# **REVO PN** POWER NETWORK

- Multi Channel Power Control
- Suitable to comm. with PLC & Multiloop
- Dedicated to solve applications
- Space & wiring reduction
- Most popular Field Bus available

**CD AUTOMATION**

**Powered by Innovation**



## **Multi-Channel SCR Power Controller**

Suitable to control Electric Heaters  
and IR Lamps in Industrial Heating Systems



[www.cdautomation.com](http://www.cdautomation.com)  
Revo PN Catalog 2018

# REVO PN POWER NETWORK

REVO PN Multichannel Power Controllers is designed to manage heating systems that use any type of infrared lamps or simple resistance heaters.


This product meets modern connectivity needs, data acquisition, monitoring and diagnostics of industrial plants through the most widely used field bus systems.

It's the ideal complement to your PLC / MULTILoop for improved power control.



## HAVE YOU CONSIDERED HOW POWER PEAKS COULD BE A PROBLEM TO YOUR BUSINESS?


The REVO PN unit is designed to handle applications with multiple zones. This enhanced unit, thanks to a particular algorithm, minimizes your energy costs through the synchronization and the power limit for each zone.

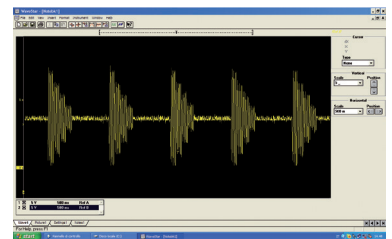

WITHOUT POWER CONTROL  
OPTIMISATION

## BENEFITS INCLUDE:


- Each loop information is managed independently.
- Calculation of instant current and RMS value of Voltage, Current/Power.
- Calculation of load resistance with Heater Break Alarm.
- Modbus Master, Modbus slave, Profibus DP, ProfiNet, Modbus/TCP and other Field bus systems.
- Elimination of power overshoot.
- Power factor close to one due to zero crossing firing
- REVO PN keeps your instantaneous power within the limit of your electricity supply contract.
- Prevents increases in energy supply tariffs imposed by your electricity supplier.

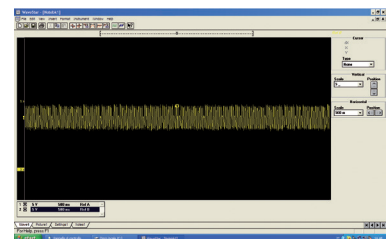

WITH POWER CONTROL  
OPTIMISATION

## DESCRIPTION:

- From 4 up to 24 independent 25A channels.
- Burst Firing, Half-Single-Cycle control.
- Built-in extra-rapid fuses easy to replace.
- Voltage swing compensation.
- Diagnostics of SCR temperature, SCR short circuit, open fuse.

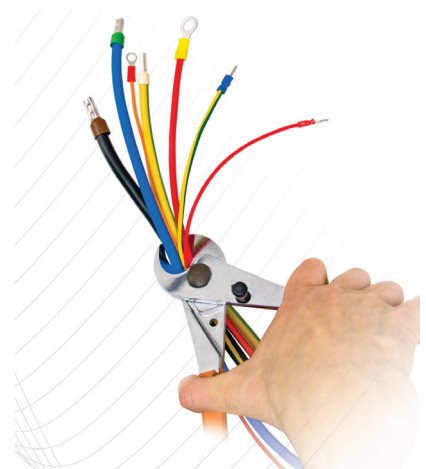

# REVO PN FAMILY



4 - 8 ONE PHASE CHANNEL



8 - 16 ONE PHASE CHANNEL



12 - 24 THREE PHASE CHANNEL  
20 - 24 ONE PHASE CHANNEL

## EACH ZONE INCLUDE:

- Thyristor Units with high I<sup>2</sup>T
- 480V Max Voltage
- Integrated Extra Rapid fuse
- Communication
- Synchronizing Circuit
- Digital Input and Relay Output



# DRAMATIC REDUCTION IN CABLE WIRING

COMPARE THE NEW **REVO PN** TO A **TRADITIONAL PLC SYSTEM** AND YOU SAVE:

- 6 wires for each zone.
- Each wire takes 11 minutes (see diagram shown).
- For each zone you save 6 wires x 11 minutes = 66 minutes in total.



**TOTAL TIME SAVED OF 26,4 HOURS FOR 24 CHANNEL!**

- SO HOW MANY ZONES/LOOPS
- DO YOU SELL IN ONE YEAR?
- MAKE A CALCULATION OF WHAT YOU CAN SAVE.
- AND YOU HAVE ONLY ONE DECISION TO MAKE.

**WHY 11 MIN. FOR EACH WIRE?**

Schematics reading and understanding,  
distances and path measuring.

Wire cutting - Wire stripping - Wire labeling  
Crimpling the lug with the copper  
Terminal block wiring

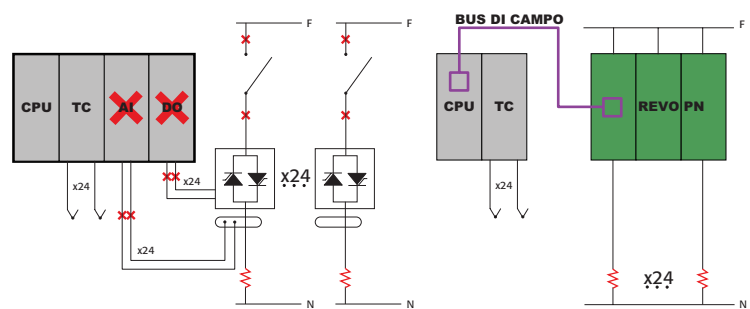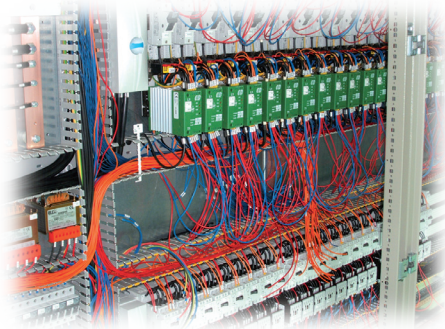

**TRADITIONAL SYSTEM**




**REVO PN SYSTEM**





# CONNECTIVITY AND CONFIGURATION

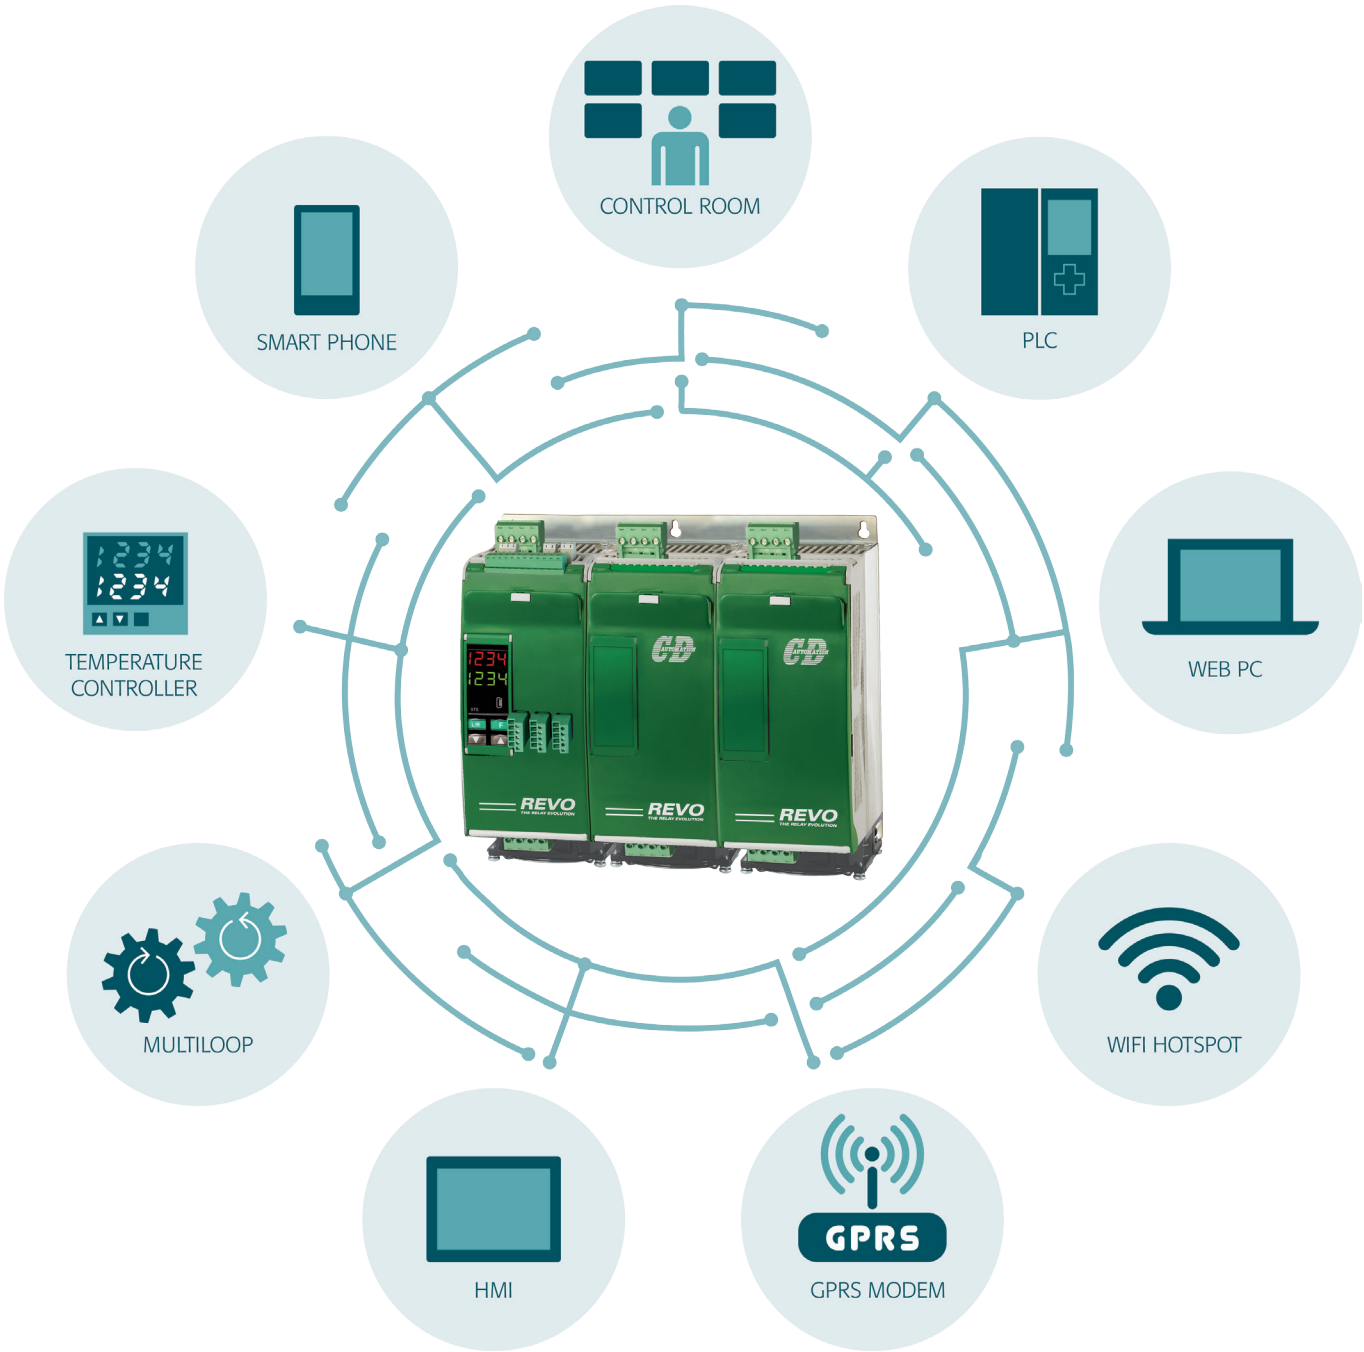

READ	WRITE
Set Point	Set Point
Alarm	One by one Configuration Parameters
Voltage	
Power	
Current	
Heater Break Alarm	
SCR Short Circuit Alarm	

# INFRARED OVEN AND THERMOFORMING

## INFRARED LAMPS WITH MEDIUM AND SHORT WAVE FORM

REVO PN is the best solution to control all types of infrared lamps.

The robust junction with high  $I^2t$  allows it to drive short-wave IR lamps.

There are several types of soft start, which cancels the phenomenon of flickering.

The synchronization makes the power factor close to one.

Power Network voltage fluctuations are compensated instantly via the feedback in the unit.



## REVO PN' S COMPACT DESIGN REDUCES CABINET DIMENSION

In the control panel shown on the right, in a 800x2000 mm layout contains 168 zones of 25A.


The units can be connected via communication to a PLC or to a multi loop temperature controller.

The connection to ProfiNet can be done via switches or chains by using the two RJ 45 ports.

The main components of the power part are already included within each module.(Fuse, Thyristor and current transformer)

You will only have to wrap the input wires for input and output for each heating element.


Communication will provide the main diagnostics on load, scr and fuses.

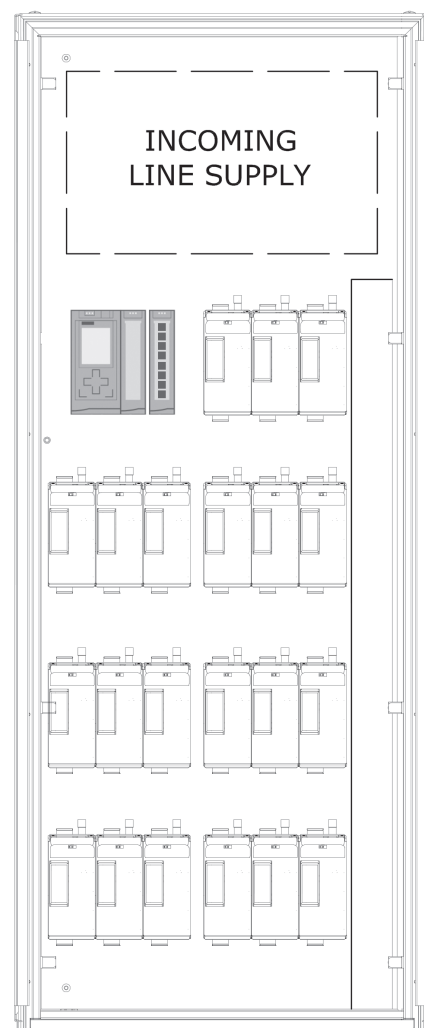

# PLASTIC EXTRUSION MACHINE

## AUTOMATION SOLUTION FOR EXTRUSION LINES

- Scalable power management, single extruder or full line.
- Modules of 12 or 24 zones already divided into three phases or one phase from 4 to 24 zones.
- Cyclic reading and writing of process variables.
- Short circuit SCR and load brake diagnostics.
- Reduced power consumption due to power grid fluctuations through live control.
- Maintains instantaneous power in the contractual limits with a power factor close to one.
- Strong bulk reduction and cabling for co-extrusion systems that can pass 100 zones.




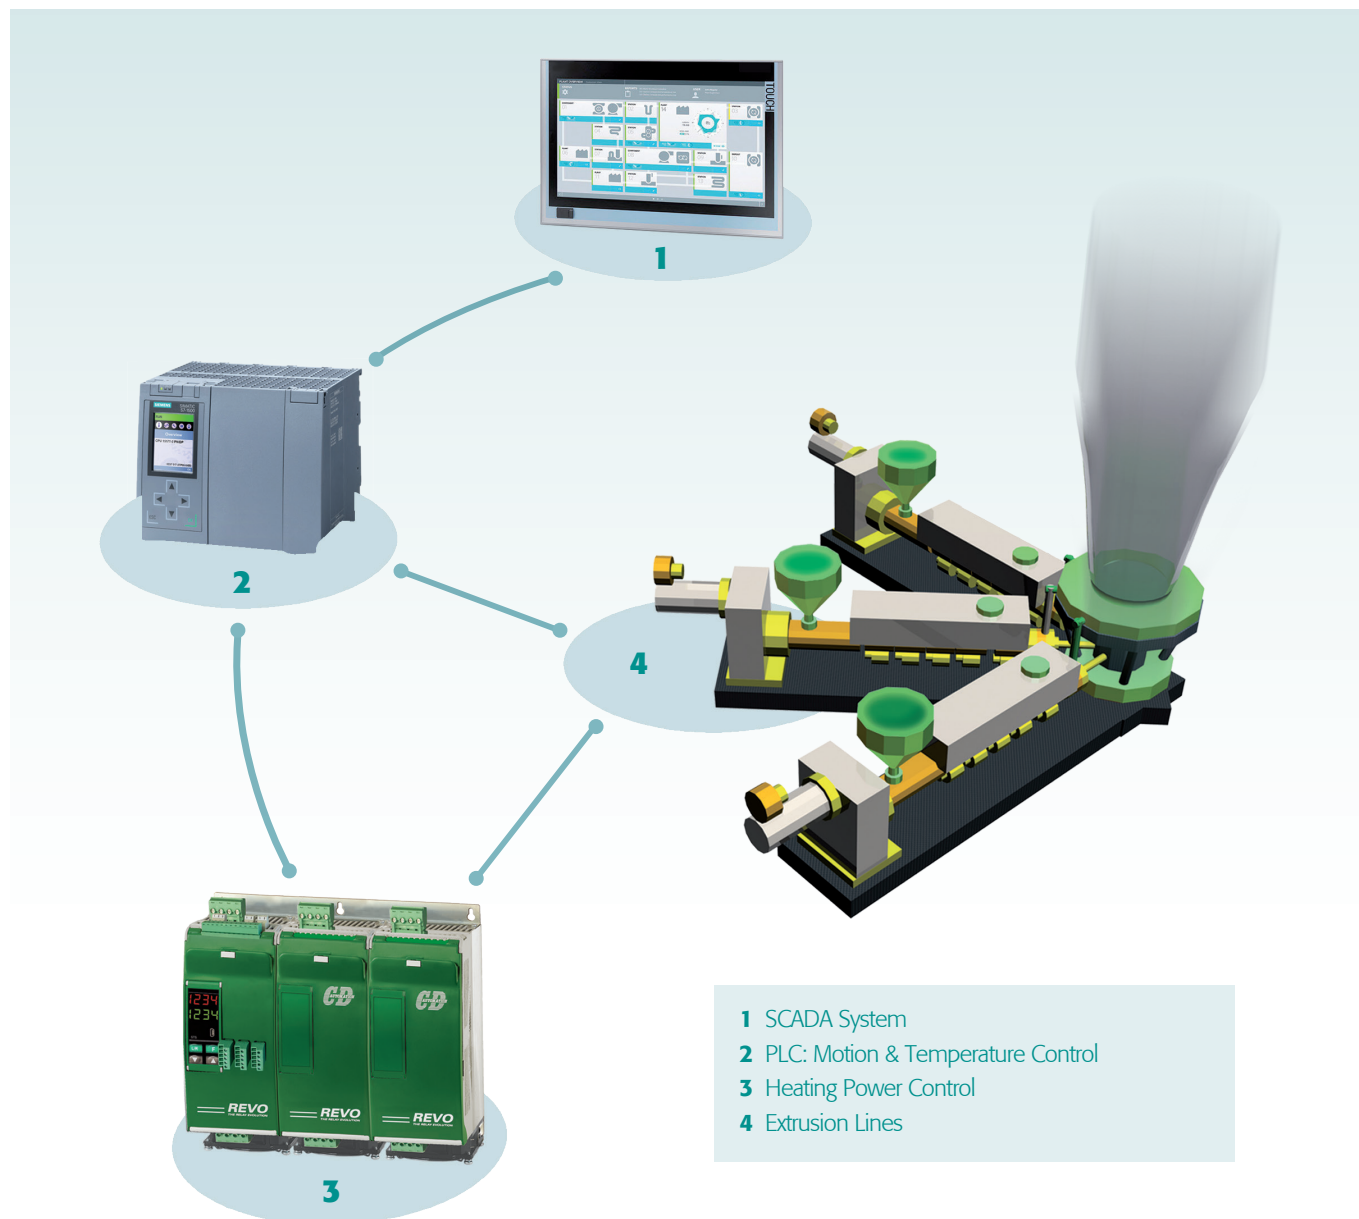




# GENERAL FEATURES

GENERAL FEATURES	
Cover and Socket material:	PolymericV2
Utilization Category	AC-51 AC-55b
IP Code	20
Method of Connecting	See pages 10/11
Delay switch ON/OFF time:	1/2 Period Max
INPUT FEATURES	
Logic input SSR	7 ÷ 30Vdc 9mA Max (ON ≥7Vdc OFF < 6Vdc)
L1 - L2 - L3 Power Input	370 - 480V
OUTPUT FEATURES (power device):	
Nominal current in continuous service	Max 25A for each load
Max peak current (10ms)	700A
Nominal Voltage range Ue	24 - 600V
Repetitive peak reverse voltage	1200V (480V) 1600V (600V)
Latching current	250mA
Leakage current	15mA eff
FUSE I²T value suggested at 500Vac tp=10msec	1260 A²s
Frequency range	47 - 70Hz
Total Power loss for 24 zone (I=Inom)	350W
Isolation Voltage Ui	2500Vac
N° 8 out SSR + CT input	Option T digit 16 on ording code



## EASY MAINTENANCE EASY FUSE REPLACEMENT

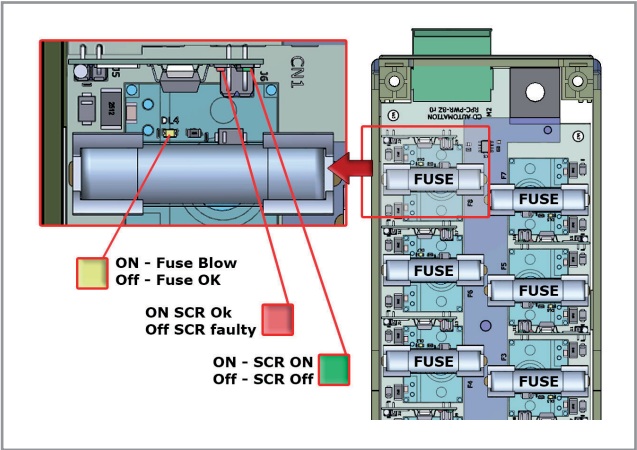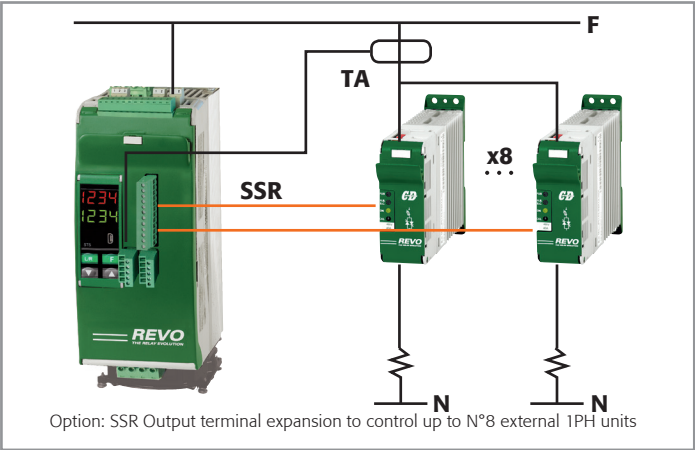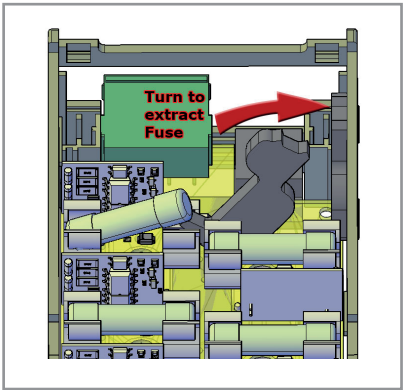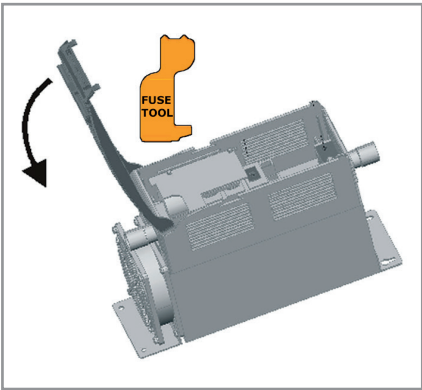

# DIMENSION AND CUT-OUT

8 ZONES		16 ZONES		24 ZONES	
SIZE	W (mm)	D (mm)	H (mm)	WHEIGHT (kg)	
8 Zones	93	170	273	3.6	
16 Zones	186	170	273	7	
24 Zones	281	170	274	10.6	


FIXING HOLES		
8 ZONES	16 ZONES	24 ZONES

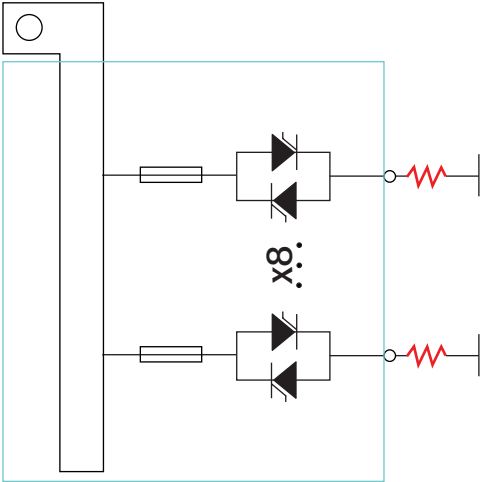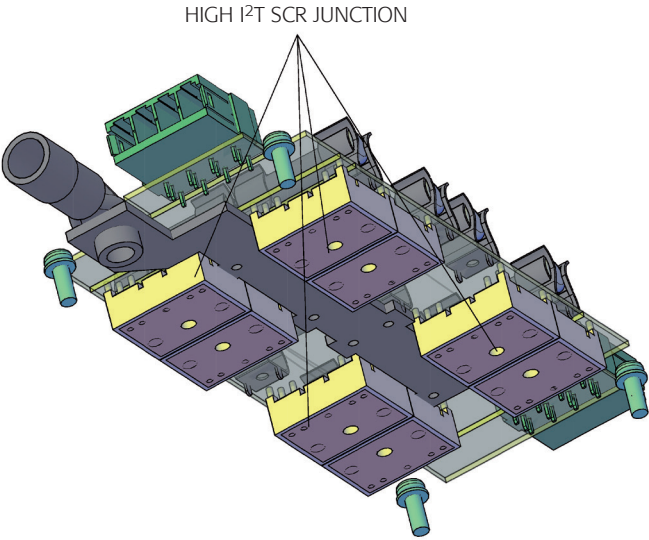


# SINGLE PHASE CONNECTION

From 4 up to 24 Single Phase independent channels sharing the same phase connection


Draw 104

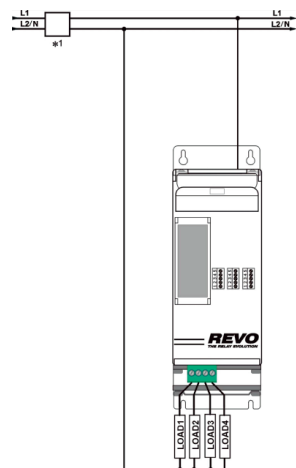


Draw 108

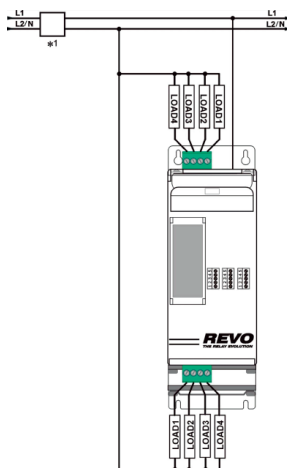


Draw 112

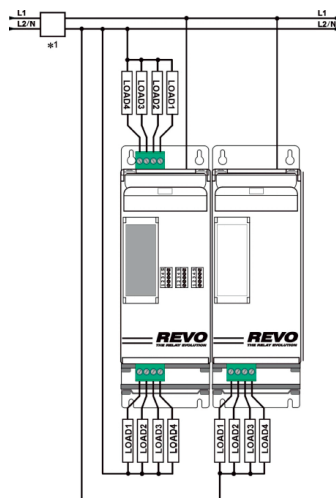


Draw 116

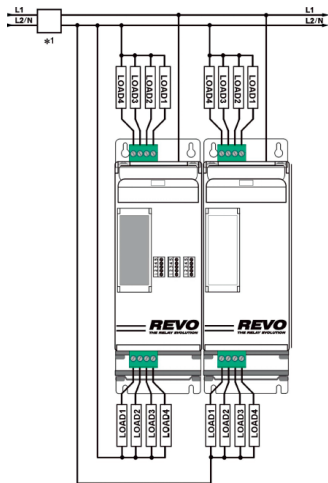

Draw 120

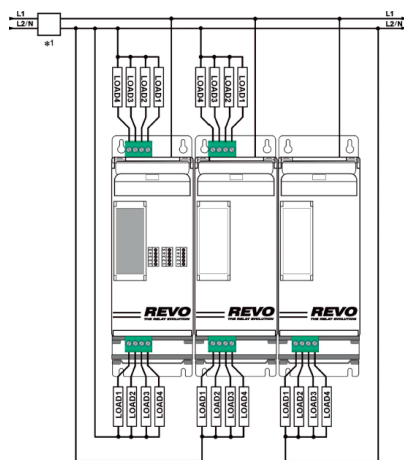

Draw 124

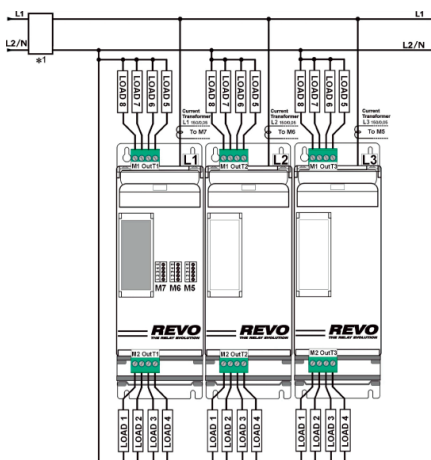


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
<b>ORDER CODE</b>	<b>P</b>	<b>N</b>	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>N° ZONE FOR CURRENT RATHING</b>																
description				3	4	5										
1 PH 4 zones, all F1-N or F1-F2 (See draw 104)				1	0	4										
1 PH 8 zones, all F1-N or F1-F2 (See draw 108)				1	0	8										
1 PH 12 zones, all F1-N or F1-F2 (See draw 112)				1	1	2										
1 PH 16 zones, all F1-N or F1-F2 (See draw 116)				1	1	6										
1 PH 20 zones, all F1-N or F1-F2 (See draw 120)				1	2	0										
1 PH 24 zones, all F1-N or F1-F2 (See draw 124)				1	2	4										
<b>MAX VOLTAGE</b>						6										
description						code										
480V						4										
<b>COMMUNICATION</b>						7										
description						code										
N°1 Ethernet Port, Modbus TCP						1										
N°1 Modbus Slave port						2										
N°1 Modbus Master port + 1 Modbus Slave Port						3										
N°1 Profibus DP Port Aux Voltage 24V						4										
N°1 Ethernet Port ProfiNet						5										
<b>AUXILIARY VOLTAGE</b>						8										
description						code										
110V Transformer						1										
220V Transformer						2										
400V Transformer						4										
<b>INPUT</b>						9										
description						code										
Non, use only communication						0										
<b>FIRING</b>															10	
description															code	Note
Half cycle															1	
Single cycle															2	
<b>CONTROL MODE</b>															11	
description															code	Note
Open Loop															1	
Power Feed Back															2	
<b>FUSE + FUSE HOLDER</b>															12	
description															code	Note
Fuse & Fuse Holder for each channel															F	
<b>FAN VOLTAGE</b>															13	
description															code	Note
110V Fan															1	
220V Fan															2	
<b>cUL US APPROVALS</b>															14	
description															code	Note
CE-EMC															0	
<b>MANUAL</b>															15	
description															code	Note
None															0	
Italian															1	
English															2	
German															3	
French															4	
<b>VERSION</b>															16	
description															code	Note
Version 1															1	
Version T with n°8 SSR out to drive external unit up to 210A															T	
This version is available only with 4/8/12/16 zone																




# THREE PHASE CONNECTION

12 or 24 Single Phase independent channels balanced on the three different phases


Draw 412

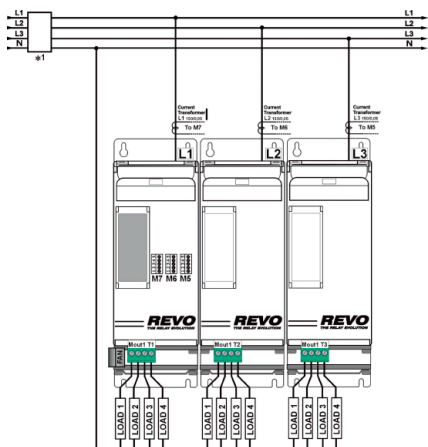


Draw 612

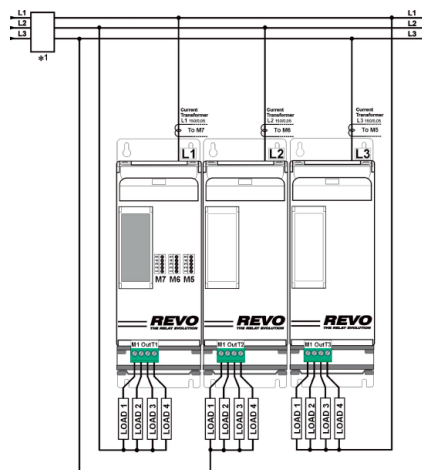

Draw 424

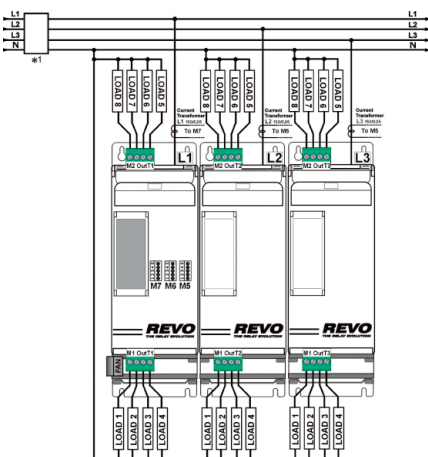

Draw 624

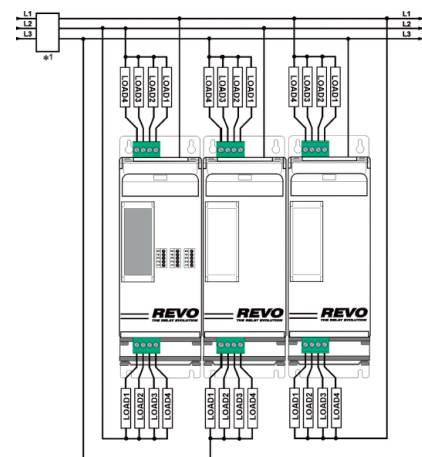

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
<b>ORDER CODE</b>	P	N	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>N° ZONE FOR CURRENT RATHING</b>																
description																
3 PH 12 zones (n°4 zones F1-N; n°4 zones F2-N; n°4 zones F3-N) (draw 412)				4	1	2										
3 PH 24 zones (n°8 zones F1-N; n°8 zones F2-N; n°8 zones F3-N) (draw 424)				4	2	4										
3 PH 12 zones (n°4 zones F1-F2; n°4 zones F2-F3; n°4 zones F1-F3) (draw 612)				6	1	2										
3 PH 24 zones (n°8 zones F1-F2; n°8 zones F2-F3; n°8 zones F1-F3) (draw 624)				6	2	4										
<b>MAX VOLTAGE</b>																
description																
480V																
<b>COMMUNICATION</b>																
description																
N°1 Ethernet Port, Modbus TCP																
N°1 Modbus Slave port																
N°1 Modbus Master port + 1 Modbus Slave Port																
N°1 Profibus DP Port																
N°1 Ethernet Port ProfiNet																
<b>AUXILIARY VOLTAGE</b>																
description																
220V Transformer																
400V Transformer																
<b>INPUT</b>																
description																
Non, use only communication																
<b>FIRING</b>																
description																
Half cycle																
Single cycle																
<b>CONTROL MODE</b>																
description																
Open Loop																
Power Feed Back																
<b>FUSE + FUSE HOLDER</b>																
description																
Fuse & Fuse Holder for each channel																
<b>FAN VOLTAGE</b>																
description																
110V Fan																
220V Fan																
<b>cUL US APPROVALS</b>																
description																
CE-EMC																
<b>MANUAL</b>																
description																
None																
Italian																
English																
German																
French																
<b>VERSION</b>																
description																
Version1																



### **Italy**

CD Automation Srl  
Via Picasso, 34/36  
20025 Legnano MI  
Italy  
**T** +39 0331 577479  
**F** +39 0331 579479  
sales@cdautomation.com  
www.cdautomation.com

CD Automation Srl (Facility)  
20023 Cantalupo MI  
Italy

### **India**

M/s Toshcon CD Automation Pvt. Ltd.  
H1 - 75 Gegal Industrial Area  
Ajmer - 305023  
India  
**T** +91 145 2787132/3/4/5  
**T** +91 145 6450601/2/3  
info@toshcon.com  
www.toshcon.com

### **England**

CD Automation UK Ltd  
Unit 9 Harvington Business Park  
Brampton Road, Eastbourne  
East Sussex, BN22 9BN  
England  
**T** +44 1323 811100  
info@cdautomation.co.uk  
www.cdautomation.co.uk