

REVO SX



SIZE SR2 - 230V / 480V

Specification

- [CLICK below to see size and dimensions](#)
- This unit is available in three version as in drawing below
- Each unit includes Fuse and Fuse Holder, thyristor and heat sink with its own Firing circuit
- Zero Crossing Firing
- Insulated input
- LED for On Off Status indication
- LED for fuse failure indication
- Plug in connection for auxiliary and power terminations
- Small dimensions Width: 36 Depth: 86 Height:121
- Din rail mounting or screw mounting
- Can be used in applications with many zones and low power as thermoforming, blow Moulding and Hot Runners

Diagram of control connection 4x3,5A

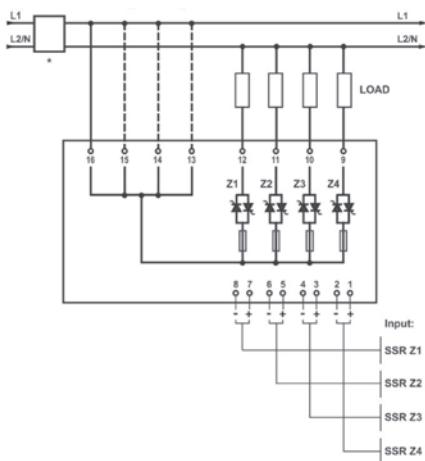


Diagram of control connection 3x4,5A


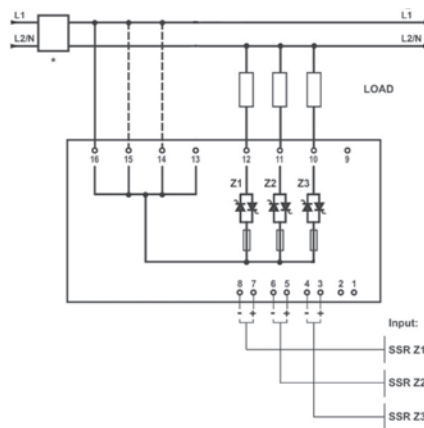


Diagram of control connection 2x7A

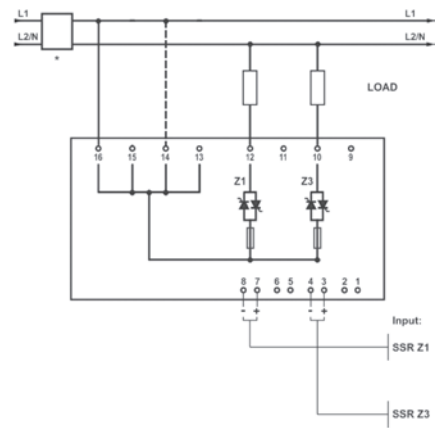

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
ORDERING CODE	R	S	X	-	-	-	-	-	-	-	-	-	-	-	-	-
NUMBER OF ZONES X CURRENT RATING				4	5	6										
description				code		note										
4 zones 3,5A each				4	0	3										
3 zones 4,5A each				3	0	4										
2 zones 7A each				2	0	7										
MAX VOLTAGE				7												
description				code		note										
230 V				2												
480 V				4		2										
VOLTAGE SUPPLY AUX.				8												
description				code		note										
No auxiliary voltage with 230V				0												
12-24V ac-dc with 480V				4												
INPUT				9												
description				code		note										
SSR				S												
FIRING				10												
description				code		note										
Zero Crossing				Z												
Random (used with Revo-PC)				R												
CONTROL MODE				11												
description				code		note										
Open Loop				0												
FUSES & OPTION												12				
description												code		Note		
Fuse + Fuse Holder												F				
Total Load Faillure with Latching												L		1		
FAN VOLTAGE												13				
description												code		Note		
No Fan Voltage												0				
APPROVALS												14				
description												code		Note		
CE EMC For European Market												0				
MANUAL												15				
description												code		Note		
None												0				
Italian												1				
English												2				
German												3				
French												4				
VERSION												16				
description												code		Note		
Version 1												1				

Note (1) This option is available only on 480V version.

Note (2) The 480V version have dimension W=48 H=121 D=86