



# THREE PHASE CONNECTION

12 or 24 Single Phase independent channels balanced on the three different phases


Draw 412

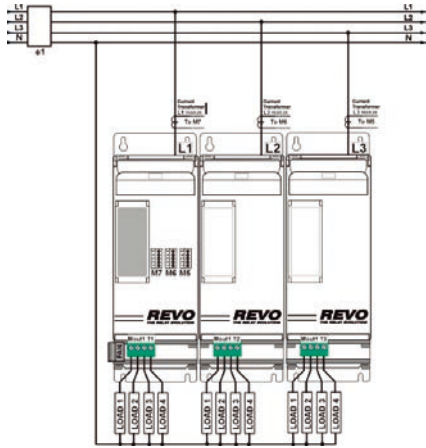


Draw 612

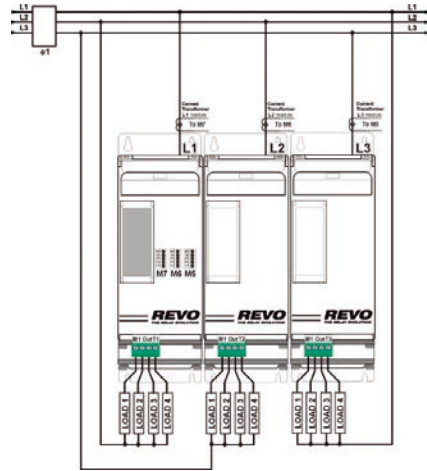

Draw 424

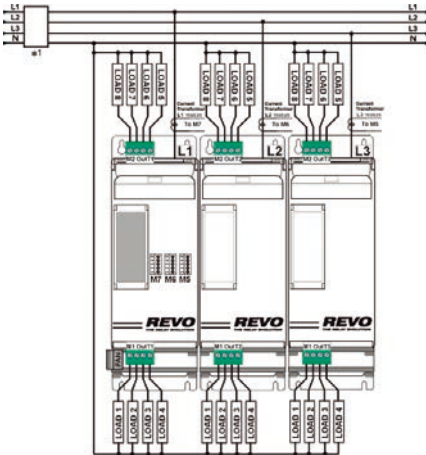

Draw 624

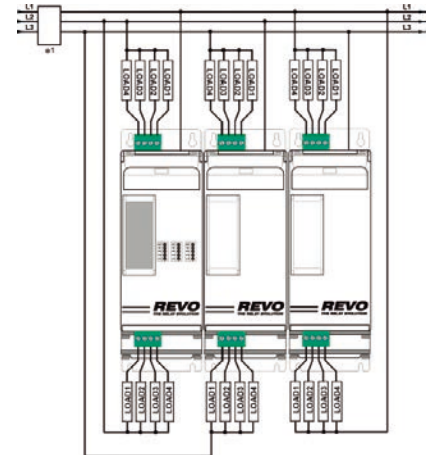

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
<b>ORDER CODE</b>	P	N	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>N° ZONE FOR CURRENT RATHING</b>			3	4	5											
description				code	note											
3 PH 12 zones (n°4 zones F1-N; n°4 zones F2-N; n°4 zones F3-N) (draw 412)				4	1	2										
3 PH 24 zones (n°8 zones F1-N; n°8 zones F2-N; n°8 zones F3-N) (draw 424)				4	2	4										
3 PH 12 zones (n°4 zones F1-F2; n°4 zones F2-F3; n°4 zones F1-F3) (draw 612)				6	1	2										
3 PH 24 zones (n°8 zones F1-F2; n°8 zones F2-F3; n°8 zones F1-F3) (draw 624)				6	2	4										
<b>MAX VOLTAGE</b>						6										
description							code	note								
480V							4									
<b>COMMUNICATION</b>								7								
description									code	note						
N°1 Ethernet Port, Modbus TCP										1						
N°1 Modbus Slave port										2						
N°1 Modbus Master port + 1 Modbus Slave Port										3						
N°1 Profibus DP Port										4						
N°1 Ethernet Port ProfiNet										5						
<b>AUXILIARY VOLTAGE</b>																
description																
220V Transformer																2
400V Transformer																4
<b>INPUT</b>																
description																
Non, use only communication																0
<b>FIRING</b>																
description																10
Half cycle																1
Single cycle																2
<b>CONTROL MODE</b>																
description																11
Open Loop																1
Power Feed Back																2
<b>FUSE + FUSE HOLDER</b>																
description																12
Fuse & Fuse Holder for each channel																F
<b>FAN VOLTAGE</b>																
description																13
110V Fan																1
220V Fan																2
<b>cUL US APPROVALS</b>																
description																14
CE-EMC																0
<b>MANUAL</b>																
description																15
None																0
Italian																1
English																2
German																3
French																4
<b>VERSION</b>																
description																16
Version1																1