


RPC 3 - Star + Neutral Connection

Up to n° 8 Three Phase Loads for each REVO PC 308

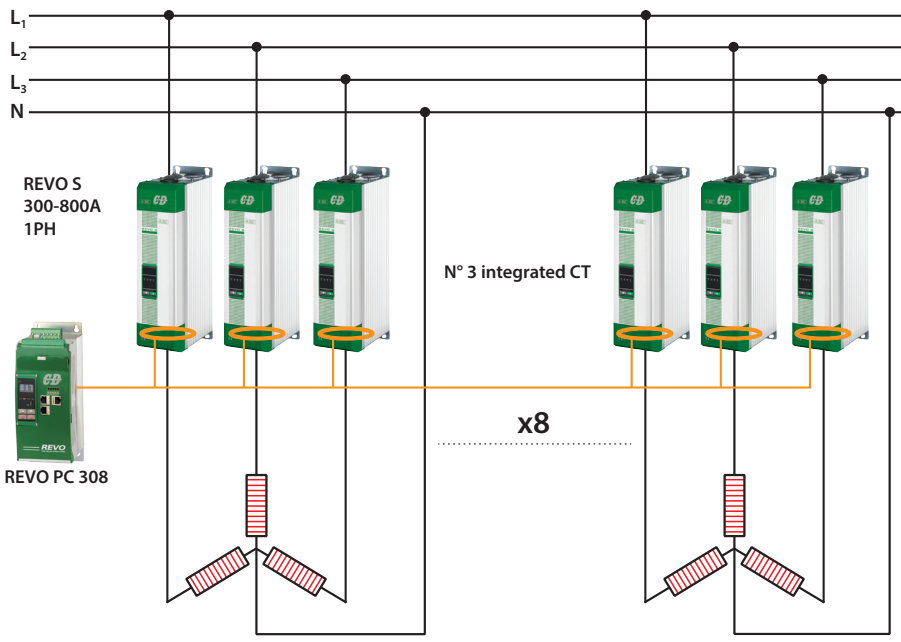

Example:

N° 1 RPC308--0001411122 REVO PC 612

N° 24 RS1800-45SZOY2021 REVO S 1PH 800A, max main voltage 480V, AUX voltage supply range: 342 to 528Vac, Logic input SSR, Fixed Fuse + CT, Fan 230V std

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
ORDER CODE	R	P	C	-	-	-	-	-	-	-	-	-	-	-	-	-

CHANNELS	4	5	6	
description	code			note
REVO-PC to drive N°4 of 3 Phase Loads with three legs (3PH) N°12 SSR output to drive N°12 REVO S 1PH	3	0	4	
REVO-PC to drive N°8 of 3 Phase Loads with three legs (3PH) N°24 SSR output to drive N°24 REVO S 1PH	3	0	8	

FEED BACK (Control Mode)	13	
description	code	note
No Feed Back	1	
Power	2	

Current Sensor Input	7	8	9	
description	code			note
N°3 Current Sensor Input for each three phase channel are required. Current Sensor is included and integrated with REVO S 1PH units with "Y" Option.	0	0	0	

Approvals	14	
description	code	note
CE EMC	1	
CE + cUL (pending)	L	

Communication	10	
description	code	note
N°1 Ethernet Port, Modbus TCP and N°3 Modbus RTU	1	
N°1 Profibus-DP® Port	4	
N°1 Ethernet Port ProfiNet	5	

Manual	15	
description	code	note
None	0	
Italian	1	
English	2	
German	3	
French	4	

Aux Voltage to be coupled with an external transformer	11	
description	code	note
24Vdc	4	

Version	16	
description	code	note
Version 2	2	

Firing	12	
description	code	note
One Cycle at 50% power demand	2	